



SL2700 DOUBLE HUNG WINDOW
 VINYL FRAME · DOUBLE GLAZED
 FOAM FILL · GRIDS · LOW E / ARGON
 NFRC CPD#: NBP-K-14-00008-00002

Batch ID: XXXXXXXXXX Order #/Line #
CR100107.21.01 00488344/001

WELLYV01 1/11/10

ENERGY PERFORMANCE RATINGS













U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.27	0.26

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Condensation Resistance
0.47	61



Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

www.nfrc.org

- | | | | |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Double Hung
Type: VSDH
Code: NBP - K - 20 |  |
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Horizontal Slider
Type: HSXX
Code: NBP - K - 22 |  |
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Picture Window
Type: FIXD
Code: NBP - K - 21 |  |
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Casement
Type: CSSV
Code: NBP - K - 23 |  |
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Casement Picture
Type: FIXD
Code: NBP - K - 25 |  |
|  | <i>This product has been rated and is certified in accordance with National Fenestration Rating Council procedures.</i> | Series: SL 2700 Awning
Type: PRAW
Code: NBP - K - 24 |  |

		WinForce Double Hung Impact	
Florida Product Approval No.	Design Pressure	Maximum Size	
22300.1	+/- 50	54x77	
Certification Agency:	Keystone Certifications, Inc. (This info can be verified at www.keystonecerts.com)		
AWS Std:	AAMA/WDMA/CSA 101/1.8/2 A440-11		
AWS CAR #:	086 - 167		
AWS Rating:	H-LC-PG50 1372x1956 (54x77)		
Glazing:	1/8" Annealed - Air Space - 5/16" Laminated		

ENERGY STAR® Qualified in Highlighted Regions

☒ Qualified




 Northeast Building Products
www.NBPwindows.com
WINFORCE DOUBLE HUNG WINDOW
 VINYL FRAME - DOUBLE GLAZED
 GRIDS - LOW E - SB70 / ARGON
 NFRC CPD# NBP-K-34-00013-00002

Batch ID: XXXXXXXXXX Order #/Line #
WF171002.04.04 00019081/010

ENERGY PERFORMANCE RATINGS

U-Factor (U.S. / I-P)

0.30

Solar Heat Gain Coefficient

0.18

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.41



Air Leakage (US/I-P)

≤ 0.3

These performance ratings are based on the test conditions specified in the NFRC procedures. See determination which can be performed on the NFRC website or determine the U-factor of your window or skylight. See the NFRC website for product type, U-factor, and air leakage of your product. For more information, visit www.nfrc.org. © 2012 NFRC. All rights reserved.

 Northeast Building Products		WinForce Double Hung Non-Impact	
Florida Product Approval No.	Design Pressure	Maximum Size	
22300.2	+/- 50	54x77	
Certification Agency:	Keystone Certifications, Inc. (This info can be verified at www.keystonewerts.com)		
AWS Std:	AAMA WDMA/CSA 1011.9.2/A440-11		
AWS CAR #:	086 - 156		
AWS Rating:	H-LC-PG50 1372x1956 (54x77)		
Glazing:	1/8" Annealed - Air Space - 1/8" Tempered		

ENERGY STAR® Qualified in Highlighted Regions

■ Qualified




 Northeast Building Products
www.NBPwindows.com
WINFORCE DOUBLE HUNG WINDOW
 VINYL FRAME - DOUBLE GLAZED
 LOW E - SB70 / ARGON
 NFRC CPD# NBP-K-34-00005-00001

Batch ID: XXXXXXXXXX Order #/Line #
WF171002.03.03 00019081/003
FC-MEAD0 10/25/11

ENERGY PERFORMANCE RATINGS

U-Factor (U.S. / I-P)

0.30

Solar Heat Gain Coefficient

0.20

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance


0.47

Air Leakage (US/I-P)

≤ 0.3

These ratings are based on NFRC test procedures. For more information, visit www.nfrc.org. For more information, visit www.nfrc.org. For more information, visit www.nfrc.org. For more information, visit www.nfrc.org.

ENERGY STAR® Certified in Highlighted Regions

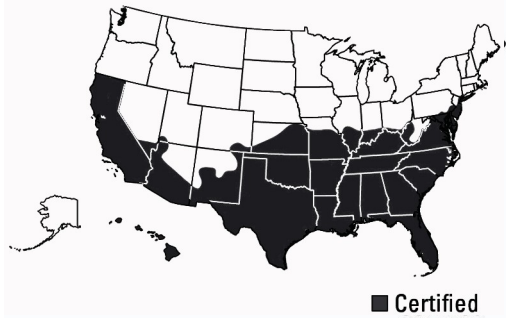

8100-SH
 PVC Frame - LOW E 366™
 Laminated Double Glazed
ARGON/AIR
 PEL-K-265-00940-00001
 FL# 33545.1 / IG NAMI-10629

ENERGY PERFORMANCE RATINGS

U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.30	0.21

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	-
0.48	

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

DESIGN PRESSURE
 As Limited by All Components

+70	-70
------------	------------

Negative Design Pressure Limited by tested pressure and Glass Tables ASTM E1300-04.
 Positive Design Pressure Limited by water test pressure and Glass Tables ASTM E1300-04.

Fixed: L2A-A 366/C 7/8" OA: (1/8" ANN-20/48" ARGON-5/16" LAMI[1/8" ANN-.090" PVB-1/8" ANN])
 805,069.00.3.00.1.00.1.00 : pos 2.0 370X78150